


MERITOR® XTENDED LUBE –
MXL™ DRIVELINES



MERITOR



100,000-Mile Lube Intervals*

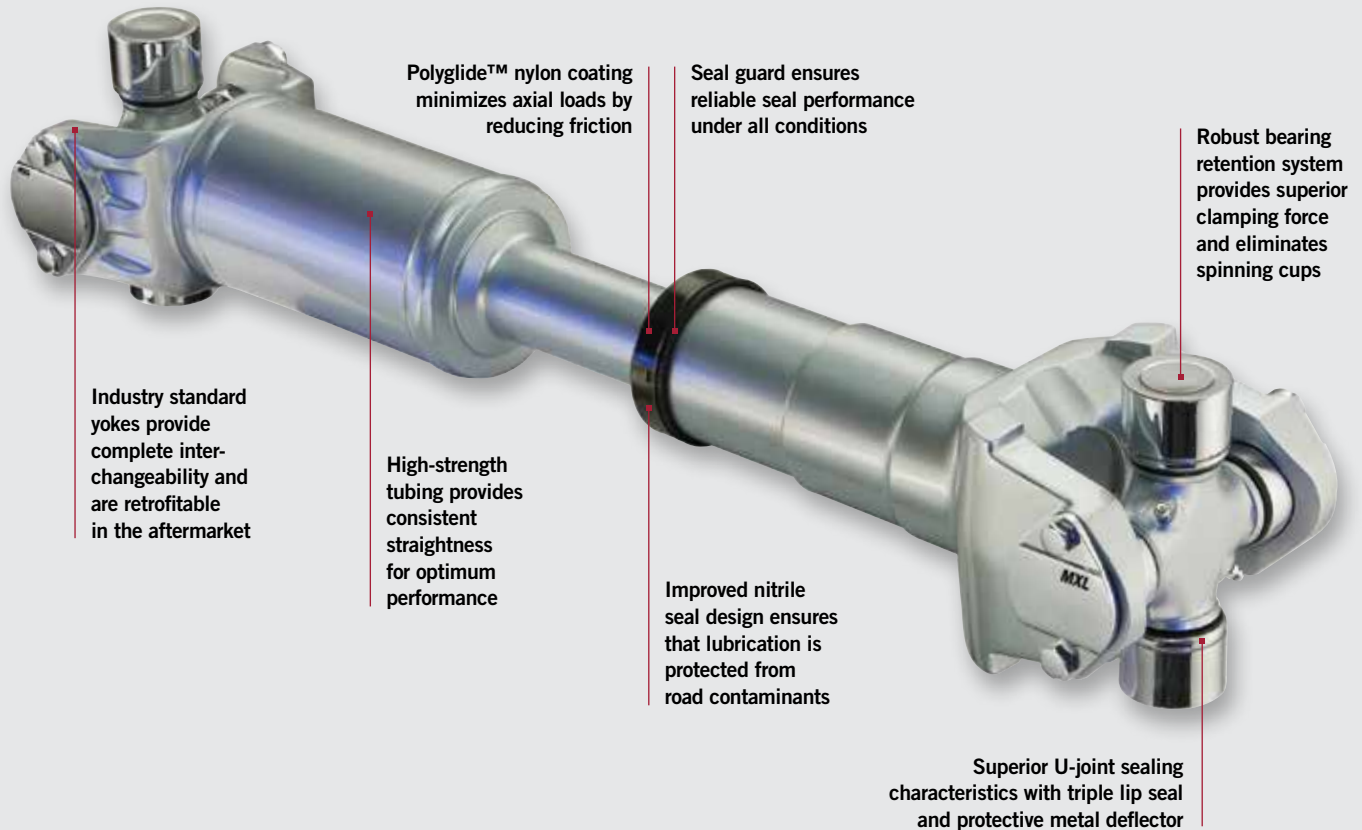

MXL Drivelines are the product of Meritor's 100-plus years of developing driveline technology. Merging the robust features of both the Meritor RPL and RN technologies, MXL Drivelines feature extended lubrication intervals as well as advanced sealing technology and features that will maximize the life of your drivelines.

Available In Popular Sizes: 16N, 17N, 176N and 18N In Both Easy Service and Full Round Styles

These components have been linking transmissions and drive axles for trouble-free driving for decades. Now Meritor has combined technologies to create the Meritor Xtended Lube – MXL Driveline.

* Inspection intervals may differ. See Meritor driveline manual for details.



Consider the following competitive advantages of Meritor Xtended Lube – MXL Drivelines

Features and Benefits

- Up to 3-year, 350,000-mile warranty for both linehaul and general service applications
- Uses industry-standard RN/10 Series end yokes, and is available for both full round and easy-service yokes
- No special grease required—standard lithium-based
- Standard with Polyglide™ coating which minimizes axial loads by reducing friction
- Tighter balance specifications reduce the potential for vibration and ensure smooth operating performance

Advanced Sealing

- Advanced sealing features include a field-proven nitrile seal design that guards against contaminants and water intrusion
- Steel shroud and seal design more robust than competitive products
- Corrosion-resistant seal guard protects and secures advanced slip seal improving durability over “booted” designs



Extended Lubrication Intervals

- Lubrication intervals (linehaul applications) now up to 100,000 miles for slip section and U-joint, reducing operating and maintenance costs

Maximum-Life U-Joints

- Nylon thrust washers eliminate metal-to-metal contact, thus preventing wear
- Triple-lip seals on U-joint keeps grease in and contaminants out



Center Bearing–Self Aligning

- Standard on MXL
- Accommodates +/- 5 degree driveline angularity
- Sealed bearing with integral deflector shield and grease barrier protects the bearing against contamination without the use of external deflectors



Extended Lubrication		
Application	MXL 16N	MXL 17N-18N
City	25,000 miles (40 000 km) or 6 months	25,000 miles (40 000 km) or 6 months
On Highway	25,000 miles (40 000 km) or 6 months	100,000 miles (160 000 km)
Linehaul	25,000 miles (40 000 km) or 6 months	100,000 miles (160 000 km)



Meritor Heavy Vehicle Systems, LLC
2135 West Maple Road
Troy, Michigan 48084 USA

For more information:
call Ontrac at 866-668-7221
or visit meritor.com

©2013 Meritor, Inc.
Litho in USA, SP-0976
Issued 03-13 (47865/11900)