
MERITOR® ALLFIT 170/250 REPLACEMENT COMPONENTS





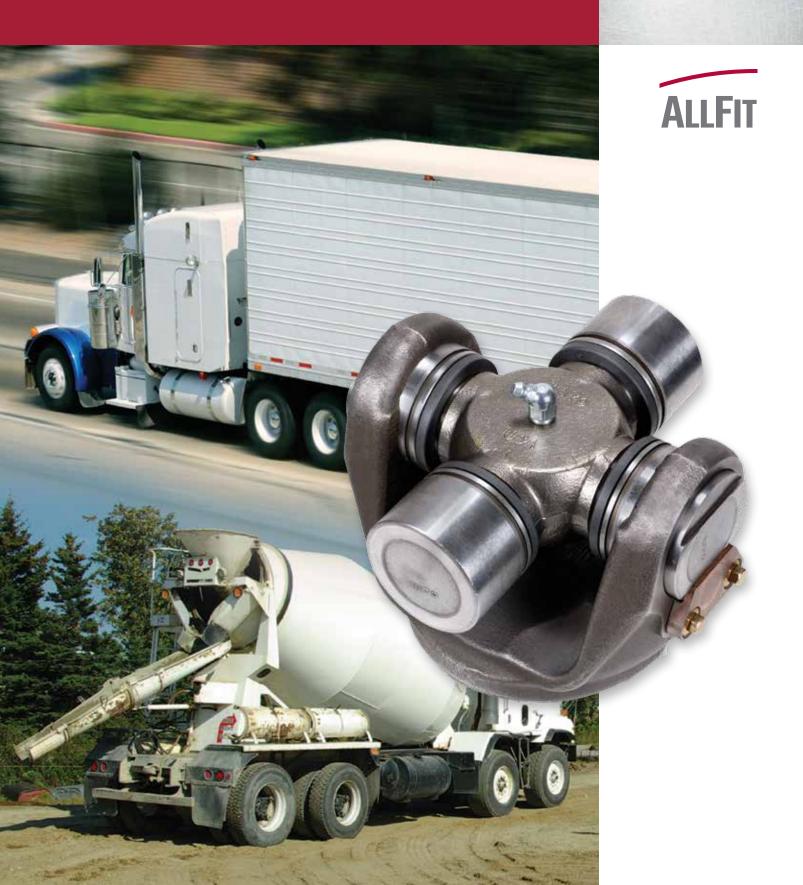

Meritor AllFit U-Joints For Strong, Dependable Performance.

Meritor AllFit u-joints help reduce maintenance costs and downtime. Advanced design features make it the ideal choice for 170 and 250 style replacement requirements.

Features and Benefits.

- Anti-rotation bearing cup provides precision lock-up of the universal joint
- Two-piece seal system and dust caps reduce maintenance and lower operating costs
- Increased contact and bearing surface improves load carrying capacity
- Precision ground journal length, bearing cup and retainer interface provides zero end-play installation reducing driveline vibration
- Bearing cup retainer design allows easier installation reducing labor costs

AllFit Part Number	Hardware Kit Part Number	DL Series*
US170X	KIT US250-170X	SPL170
US250X	KIT US250-170X	SPL250

*SPL - Spicer® Life Series driveshafts - is a registered trademark of Dana Corporation. Hardware kit is for use with these u-joints only and is not interchangeable with OEM retention hardware or u-joint.



Key Features of AllFit U-Joints

- 1. Anti-spin bearing cup retaining system
- 2. High performance sealing system
- 3. Thrust washer with 360° lubrication system
- 4. Extra life needle bearings
- 5. Extra large lubrication reservoir



Popular 170/250 Replacement Options.

Meritor offers even more 170/250 replacement components to complement its u-joint offering. From end yokes to tubing to yoke shafts and more, the Meritor AllFit portfolio includes a wide range of replacement options to quickly get vehicles back on the road.

End Yokes	End Yokes									
AllFit Part Number	DL Series*	Spline/Number of Teeth	Hub Diameter	Length Through Bore	CL to End of Hub	Joint Angle				
SPL170HR Series A-6	6.457 B-2.165									
170N-4-1271-1	170HR	2.39"/46		2.75"	5.59"	25°				
170N-4-201-1X	170HR	2.27"/44	3.00"	2.50"	5.27"	25°				
170N-4-241-1X	170HR	2.02"/39	2.62"	2.50"	6.50"	45°				
170N-4-261-1X	170HR	2.02"/39	3.00"	2.28"	5.16"	25°				
170N-4-281-1X	170HR	2.02"/39	3.00"	2.28"	6.24"	45°				
170N-4-521-1X	170HR	2.75"/10	3.75"	3.00"	5.86"	25°				
170N-4-561-1	170HR	2.79"/54	_	2.75"	5.60"	25°				
170N-4-671-1X	170HR	2.02"/39	3.00"	2.31"	6.39"	45°				
170N-4-721-1X	170HR	2.39"/46	3.25"	2.33"	5.10"	25°				
SPL250HR Series A-	6.413 B-2.362									
250N-4-21-1	250HR	2.39"/46	_	2.75"	5.75"	25°				
250N-4-241-1X	250HR	2.75"/10	3.75"	3.00"	6.30"	25°				
250N-4-271-1	250HR	2.79"/54	_	2.75"	5.70"	25°				
250N-4-351-1X	250HR	2.39"/46	3.25"	2.31"	5.31"	25°				
250N-4-81-1X	250HR	2.27"/44	3.00"	2.50"	5.49"	25°				

^{*}SPL - Spicer® Life Series driveshafts - is a registered trademark of Dana Corporation.

Weld Yokes										
Part Number	DL Series*	Tubing Size (O.D. x Wall Thickness)	Butt Diameter	Type of Butt	CL to Point of Weld	Joint Angle				
SPL170 Series A	SPL170 Series A-6.027 B-2.165									
170N-28-17	SPL170	4.960" x .118"	4.75"	H0	3.69"	25°				
SPL250 Series A-5.985 B-2.362										
250M-28-17	SPL250	5.196" x .236"	4.75"	Н0	4.10"	25°				

^{*}SPL - Spicer® Life Series driveshafts - is a registered trademark of Dana Corporation.



Midship S	Midship Stub Shaft									
Part Number	Spline/Number of Teeth	Bearing Diameter	Tubing Diameter and Wall Thickness	Butt Diameter	Length of Spline	End of Spline to Point of Weld	Thread Size	End of Spline to Bearing Shoulder	Shoulder Diameter	Length of Shoulder
250N-53-11	2.35"/46	2.362"	5.196" x .236"	4.75"	2.72"	5.31"	1.25-18-M	4.00"	2.88"	0.81"

Flanged nut N20-74-91 included with boxed midship

Tubing							
Part Number	Outside Diameter	Wall Thickness	Length				
RT-496-118-72	4.96"	0.118"	72"				
RT-5197-236-72	5.197"	0.236"	72"				



Sleeve						
Part Number	DL Series*	Spline/Number of Teeth	End of Spline To Weld	Butt Diameter		
250N-55-31X	SPL170/SPL250	3.858"/38	6.87"	4.748"		

^{*}SPL - Spicer® Life Series driveshafts - is a registered trademark of Dana Corporation.



Yoke Snatts							
Part Number	DL Series*	Spline/Number of Teeth	Length of Spline	End of Spline To Radius	CL To End of Tube	CL To End Of Spline	
170N-82-21X	SPL170	3.858"/38	5.69"	7.81"	7.12"	11.81"	
250N-82-21X	SPL250	3.858"/38	5.69"	7.81"	7.12"	11.81"	

^{*}SPL - Spicer® Life Series driveshafts - is a registered trademark of Dana Corporation.

Product models, brands and names depicted herein are the property of their respective owners and are not in any way associated with Meritor, Inc., or its affiliates.

